


PLAKA – PLASTIC END CONE

End cone for spacer tube

REF 04.01.09 - Version V01 - 12/08/2020



Description

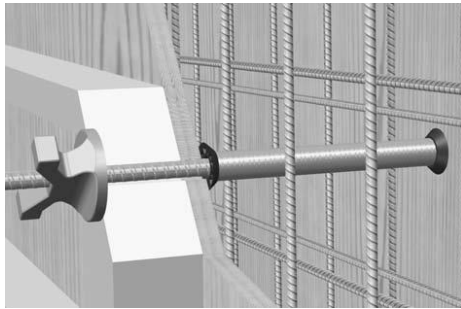

Tapered plastic cone for PVC or fiber concrete spacer tubes. They provide a large contact area to protect the formwork.

After formwork removal, the cones can be stripped with the

following cone removal tool.


The plastic caps are reusable.



Application fields

They are to be plugged into either side of the spacer tubes of the formwork system.

After removal with the cone removal tool, each side of the tube must be sealed with special plugs, depending on the level of sealing that is needed.

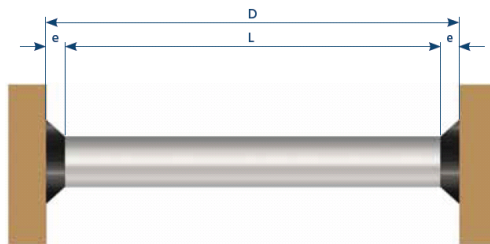

Length of the tube:

$$L = D - 2 \times e$$

Dimensions

Material dimensions						
	Product Code	Øi (mm)	Øe (mm)	e (mm)	Units/box	Weight (Kg/100)
	RS 5422	22	42	10	1000	0,62
	RS 5426	26	42	10	500	0,71
	RS 5432	32	51	10	250	0,78

	Product code	Units/box	Weight (Kg/1)
<p>End cap removal tool</p>	FRARRACO	1	0.15

©Copyright protected

This sheet, written with great care, supersedes all previous versions. The technical information on the design, models, illustrations, design values and specifications are believed to be accurate. We make no warranties (expressed or implied) as to its accuracy and assumes no liability in connection with non suitable use of this product. We reserve the right to modify the contents of this form without prior notice.